



Technische fiche Pro-line Venus Series

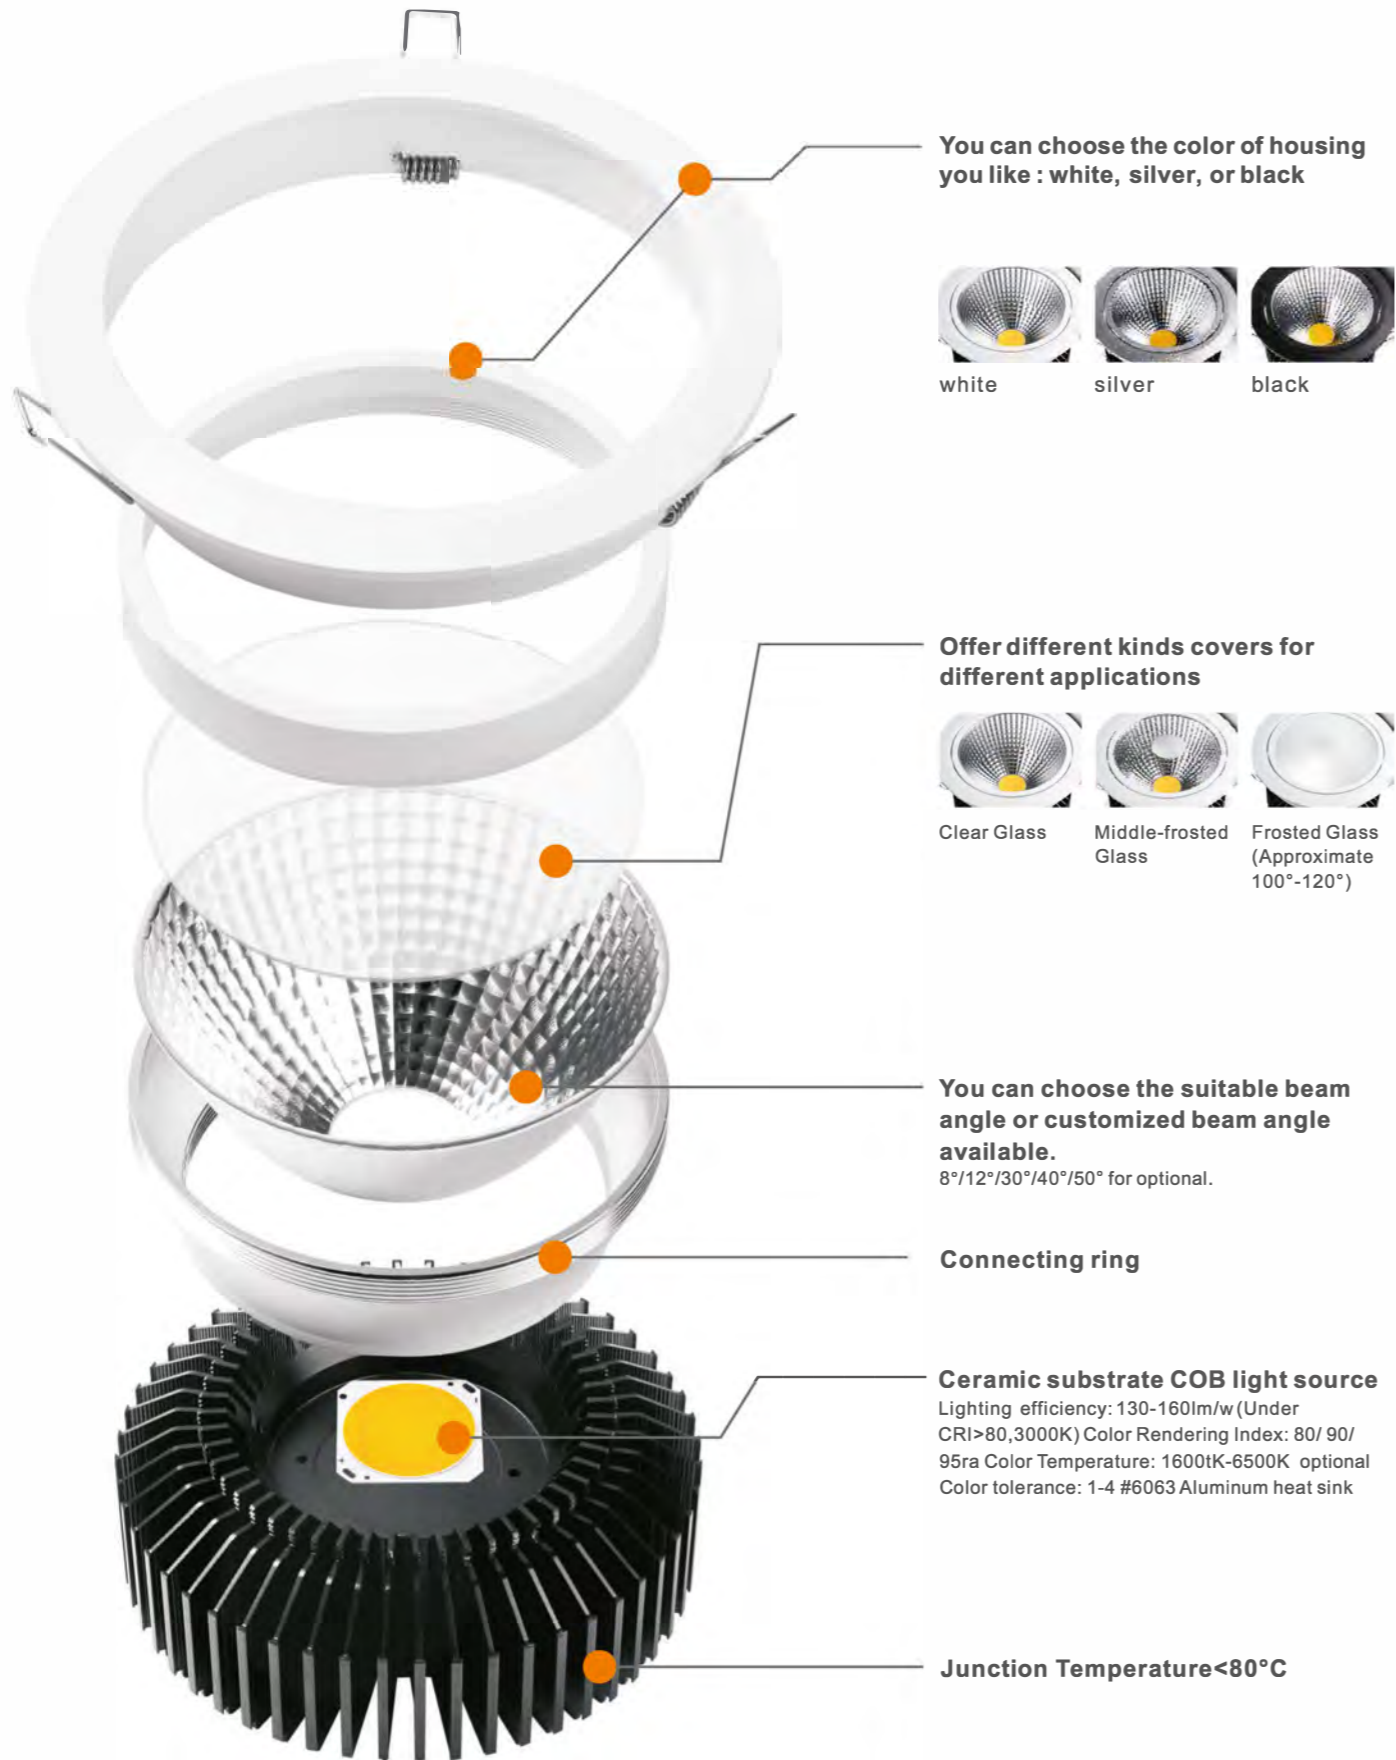


Ceramic substrate COB light source

The light decay < 25% after working for 30000hrs
Even if half of the chips don't work, just less than 20% reduction in luminous efficiency

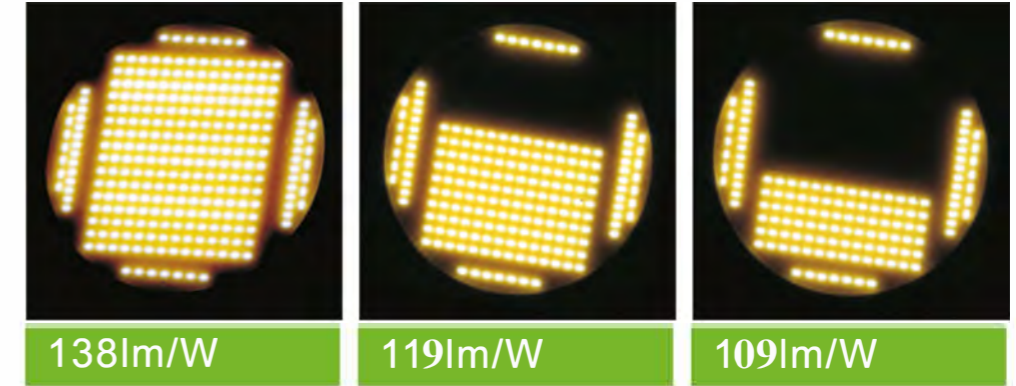


Pure aluminum reflective cup

Anodizing, anti-corrosiveness and anti-aging, which is different from electroplating plastic cup Optional beam angle : 8°/12°/30°/40°/50°

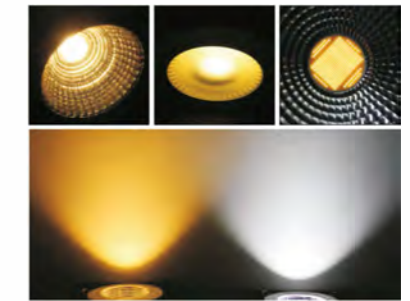

full tempered glass:

even if broken, it will not endanger your safety
optional glass: clear glass, frosted glass, middle-frosted glass

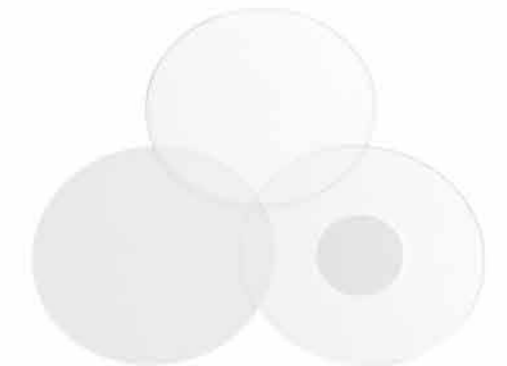

Simple, convenient and effective installation:



First Step:
Connect the AC port of driver to the power, then insert the driver into the ceiling hole



Second Step:
Make the slips vertical



Third Step:
Putting the lamp body into the ceiling holes



Forth Step:
Turn the light on after finishing the installation.

Technische fiche Pro-line Venus 20W (inbouwgat 120-130mm)


LS-DLV20 20W Downlight **LONG LIFE LED TECHNOLOGY** Pro-Line Premium LED





netweight **0.7Kg** **IP42 V0**

Dimensions:



Size:mm

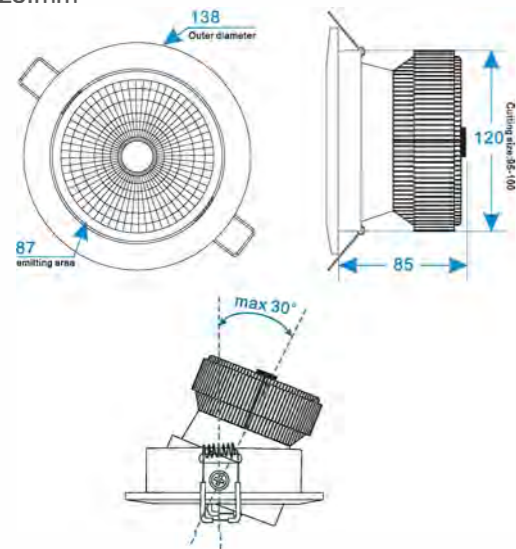

Graphical Representation for WW30°

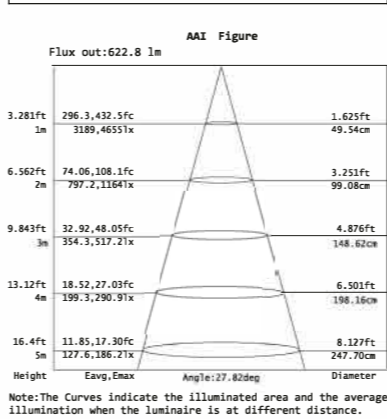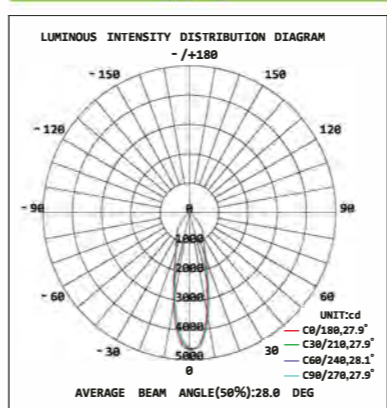

Graphical Representation for NW 50°

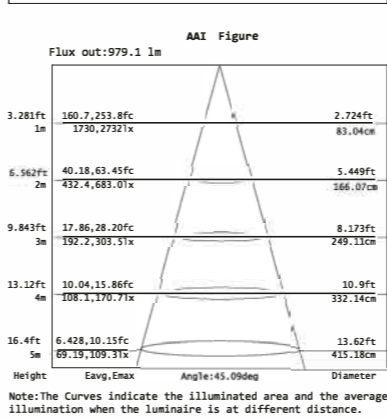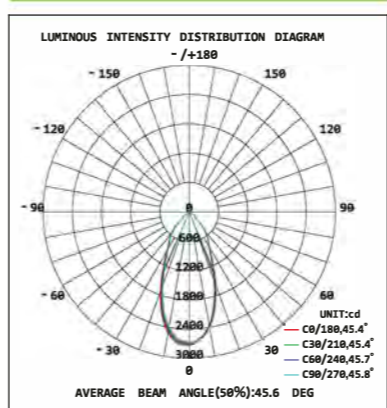

Product features

LED Power	20W
Lamp Consumption	22W
Ra:	>80(max95)
SDCM:	<4
Dimension:	φ 138*H96mm
Cutout:	φ 116-127mm
Beam Angle:	30° /50°
Input Voltage:	100-277vAC/180-270VAC
Frequency Range:	50-60hz
Working Temperature:	-45°C-45°C
Storage Temperature:	-25°C-65°C
Color of Frame:	white/black/silver
Dimmable Available:	Triac/0-10v/DALI/Wi-Fi
Lifespan:	50000 hrs
Certificate:	CE/RoHS/TÜV/SAA/Erp
Warranty:	5 years

Data Sheet

Versions	Part No.	Coolor	CCT	Output (Ra80)	Output (Ra90)
Super brightness	LS-SCL20W-W	warm white	2900-3200k	2200-2300lm	1800-1900lm
	LS-SCL20W-N	natural white	3900-4200k	2300-2400lm	1900-1950lm
	LS-SCL20W-C	cool white	5900-6200k	2400-2500lm	1950-2000lm
Normal	LS-NCL20W-W	warm white	2900-3200k	1850-1900lm	1600-1700lm
	LS-NCL20W-N	natural white	3900-4200k	1900-1950lm	1700-1750lm
	LS-NCL20W-C	cool white	5900-6200k	1950-2000lm	1750-1800lm
Economical	LS-ECL20W-W	warm white	2900-3200k	1800-1850lm	1550-1600lm
	LS-ECL20W-N	natural white	3900-4200k	1850-1900lm	1600-1650lm
	LS-ECL20W-C	cool white	5900-6200k	1900-2000lm	1650-1700lm

Packing



Working Temperature:

